



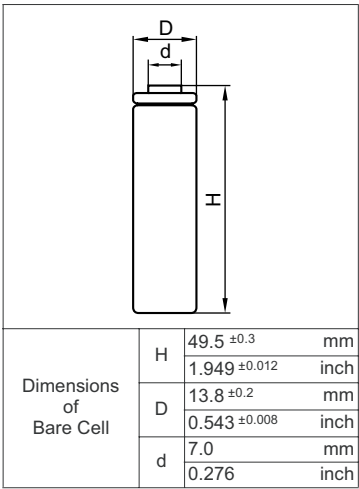


Nominal Capacity		700mAh				
Nominal Voltage		1.2V				
Charging Current	Standard	70mA				
	Quick	210mA				
	Fast	1050mA				
Charging Time	Standard	14 to 16Hrs.				
	Quick	4 to 6Hrs.				
	Fast	about 1Hr.				
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]			
		Quick	10°C to +45°C [+50°F to 113°F]			
		Fast	0°C to +45°C [+32°F to 113°F]			
	Discharge		-20°C to +60°C [-4°F to 140°F]			
	Storage		-30°C to +50°C [-22°F to 122°F]			
Internal Impedance (Av.) (at 50% discharge)		16.0mΩ (at 1000Hz)				
Weight		23g/0.81oz				
Dimensions(D)×(H) (with tube)		14.3	⁰ _{-0.5}	× 50.2	⁰ ₋₁	mm
		0.56	⁰ _{-0.02}	× 1.98	⁰ _{-0.04}	inch

Typical Characteristics


Charge

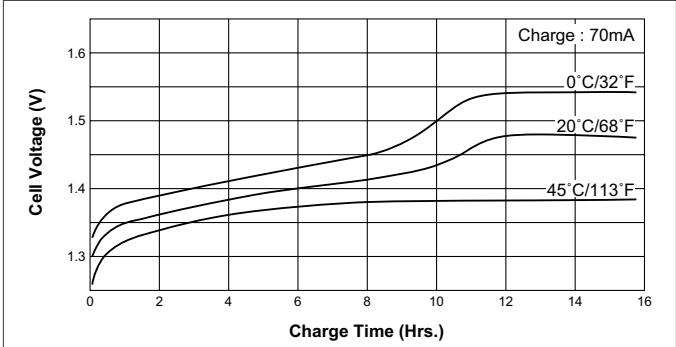


Discharge (at high rate)

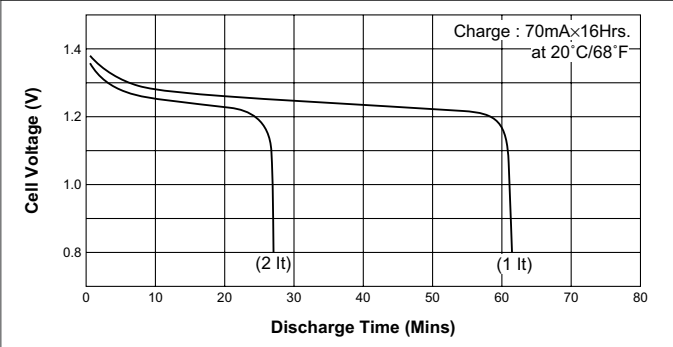


Charge

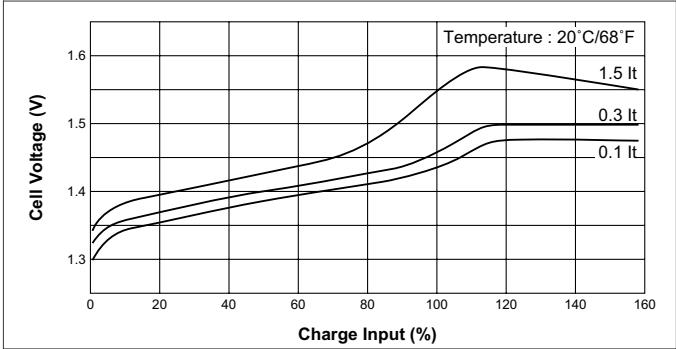


Discharge (at high rate)

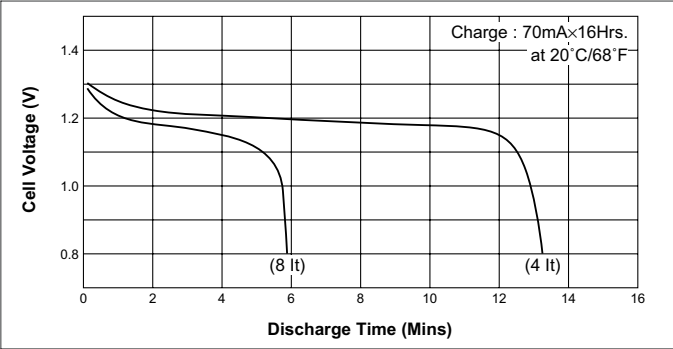

Discharge (at low rate)

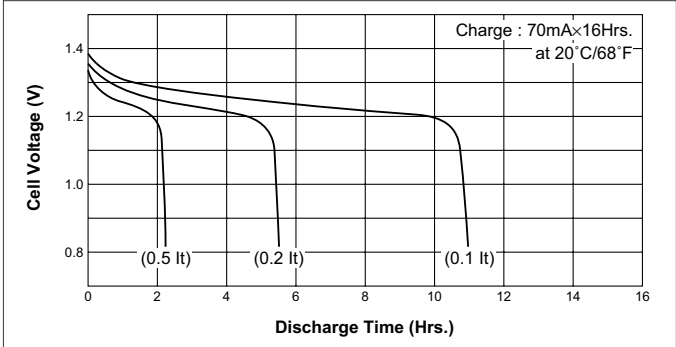

Temperature (Charge & Discharge)

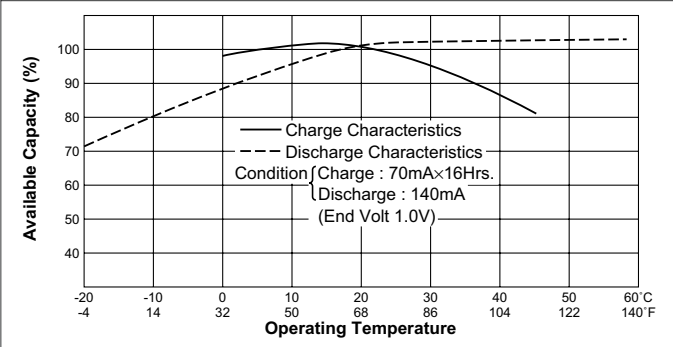

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[N-3000CR](#) [N-700AAC](#)